

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**


**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>4</sup> :  A61B 17/14	A1	(11) International Publication Number: WO 89/ 09028 (43) International Publication Date: 5 October 1989 (05.10.89)
(21) International Application Number: PCT/SE89/00141 (22) International Filing Date: 17 March 1989 (17.03.89) (31) Priority Application Number: 8801016-0 (32) Priority Date: 21 March 1988 (21.03.88) (33) Priority Country: SE (71) Applicant (for all designated States except US): MIT AB [SE/SE]; Södergatan 7, S-275 00 Sjöbo (SE). (72) Inventors; and (75) Inventors/Applicants (for US only) : RYD, Leif, Erik, Sigfrid, H:son [SE/SE]; Sköldgränd 12, S-223 75 Lund (SE). BERTILSSON-LINDSTRAND, Anders, Olof [SE/SE]; Pålsvägen 6, S-223 62 Lund (SE). TOKSVIK-LARSEN, Sören [SE/SE]; Vibrafonvägen 5, S-245 00 Staffanstorp (SE).	(74) Agents: WAGNER, Heinz et al.; H Wagner & Co AB, Norra Vallgatan 72, S-211 22 Malmö (SE). (81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE, DE (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US. Published With international search report. With amended claims.	

(54) Title: SAW-BLADE FOR SAWING LIVING HUMAN BONE

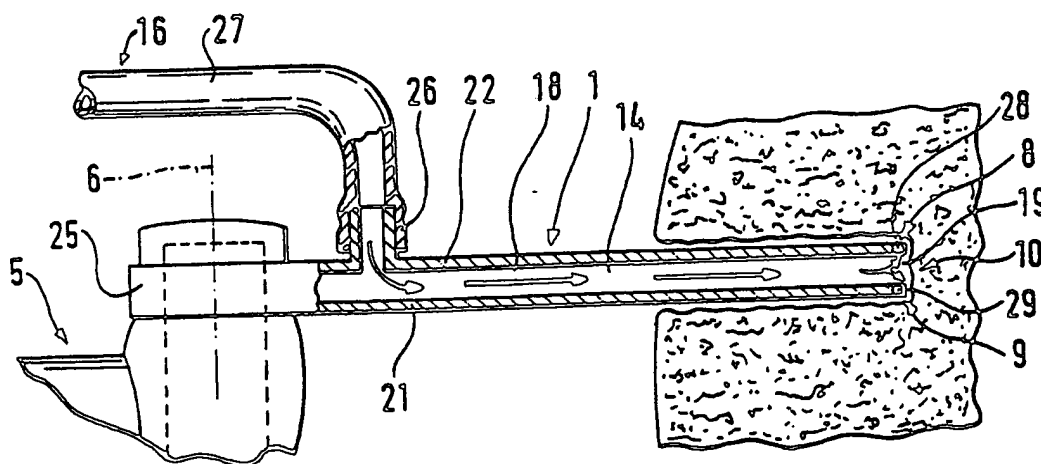

## (57) Abstract

This invention relates to a saw-blade for sawing living human bone at surgical operations, said saw-blade (1) presenting on at least one side (10) at least two saw portions (8, 9) and said saw-blade (1) having at least one inner space (14) through which coolant (18) is adapted to flow for cooling the saw-blade (1) during sawing. For efficient direct cooling of the saw portions (8, 9) and continuous cleaning thereof during sawing, the space (14) extends up to the two saw portions (8, 9) and is open between them in order, on one hand, to conduct coolant (18) to the saw portions (8, 9) for cooling them, and, on the other hand, to cause coolant (18) to emerge between the saw portions (8, 9) for carrying off bone residues or other saw residues in a direction away from the saw portions (8, 9).

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	ML	Mali
AU	Australia	GA	Gabon	MR	Mauritania
BB	Barbados	GB	United Kingdom	MW	Malawi
BE	Belgium	HU	Hungary	NL	Netherlands
BG	Bulgaria	IT	Italy	NO	Norway
BJ	Benin	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland				

## 1.

Saw-blade for sawing living human bone.

This invention relates to a saw-blade for sawing living human bone at surgical operations. the saw-blade presenting on at least one side at least two saw portions and the saw-blade having at least one inner space through  
5 which coolant is intended to flow for cooling the saw-blade during sawing.

Operations in orthopedic surgery often involve shortening, cutting, cleaving or otherwise working bone structures. This is done by chisel, drill, sometimes by  
10 milling cutters and sometimes, where straight cuts or planar bone surfaces are desired, by saws. To ensure precision in sawing there are always used very high speeds, 20 000 rpm. of the saw which then "vibrates" in a stable manner. This way of working the bone is customary at  
15 operations involving artificial joints (joint prostheses), especially in the knee joint. However, also when operations are made in the hip joint and joints in the upper extremity, use is made of sawing.

Artificial joints are fixed to the bone tissue by  
20 means of so-called bone cement (acrylic plastic) or by trying to realise growth of bone directly into the prosthesis. Such anchoring at present is the greatest problem in prosthesis surgery; the prostheses come loose from the bone tissue, making it necessary to perform another operation. A corresponding problem exists at operations not  
25 involving a prosthesis, i.e. where bone is sawn off and screwed together at another angle. In some cases, the bone does not heal after such operation.

With the use of extant saws, high temperatures develop. By way of example, there have been measured in the  
30 clinical situation, at an operation involving an artificial joint in the knee joint, temperatures ranging between 45 and  $>100^{\circ}\text{C}$ , the average value being about  $70^{\circ}\text{C}$ . The critical temperature for bone tissue is considered to lie at  $47^{\circ}\text{C}$ . The conclusion is that the bone  
35 around the saw cut is killed at the operation. This may

## 2.

be one of the reasons why prostheses come loose and, respectively, that healing sometimes does not occur in the contemplated manner.

During sawing at this kind of operations it is customary to cool the bone by supply of liquid dropwise to the saw-blade or by spraying liquid thereonto. In laboratory tests as well as under clinical conditions, it has proved that such cooling has no effect at all; the problem of heat development on sawing in orthopedics is still unsolved at present.

In patent literature there are some specifications that treat of the supply of coolant to the saw-blade for the cooling thereof. Thus US-A-4 008 720 describes a saw-blade having three coolant passages. At the rear portions of the saw-blade said passages connect onto a coolant supply conduit and extend in a forward direction along the saw-blade, opening at a distance from the saw teeth in one of the saw-blade sides which run in parallel with the plane of oscillation of the saw-blade. The passages opening at a distance from the saw teeth, the coolant will not contact said teeth, which implies that they are not cooled directly. Instead, the heat has time to spread rearwardly in the saw-blade until it reaches cooled portions thereof, and the harm is done already. As the passages besides open into those sides of the saw-blade which run in parallel with the plane of oscillation of the saw-blade, the exiting coolant jets will not be directed outwardly away from the saw-blade for efficiently carrying off saw residues in a direction away from the saw teeth.

The object of the present invention is to provide a saw-blade in which the above-mentioned problems are eliminated. This is achieved, according to the invention, substantially by means of the characteristic features defined in appendant claim 1.

As the coolant space in the saw-blade according to the invention extends all the way to the saw portions, coolant can get in direct contact with said portions

3.

for efficient direct cooling thereof. Moreover, as coolant can emerge between the saw teeth, the coolant is able to flush away saw residues from the saw teeth, which will prevent clogging of the teeth during sawing.

5 Practical tests have shown that the temperature of all portions of the saw-blade according to the invention is fully controllable; it has been possible, quite easily, to maintain a saw-blade temperature of maximally 25°C. It has further proved that said coolant effectively flushes the saw teeth and prevents clogging of  
10 them, as a result of which it has been possible to increase the sawing effect and, as a consequence, to reduce the time of operation.

The invention is more fully elucidated in the  
15 following with reference to the accompanying drawings, in which:

Fig. 1 is a side view, partly in section, of the saw-blade according to the invention;

Fig. 2 is a plan view of the saw-blade shown in  
20 Fig. 1;

Fig. 3 is a perspective view of the saw-blade according to the invention and the driving tool therefor;

Fig. 4 is a perspective view of a front part of  
25 the saw-blade according to the invention;

Fig. 5 is a perspective view of an alternative embodiment of the saw-blade according to the invention;

Fig. 6 is a perspective view of a second alternative embodiment of the saw-blade according to the  
30 invention;

Fig. 7 illustrates a saw wire device for the saw-blade shown in Fig. 6;

Fig. 8 is a perspective view of a third alternative embodiment of the saw-blade according to the  
35 invention; and

Fig. 9, finally, is a perspective view, partly in section, of the front part of the saw-blade shown in Fig. 8.

The saw-blades 1, 2, 3 and 4 illustrated in the  
40 drawing figures are primarily intended for sawing living

## 4.

human bone at operations in orthopedic surgery, but they may also be used in other kinds of surgical operations. The saw-blades 1, 2, 3 according to Figs. 1 to 6 are attachable to a drive assembly 5 which is adapted to oscillate the saw-blades 1, 2 and 3 back and forth at high speed, e.g. about 20 000 rpm, about a center of oscillation 6. The saw-blade 4 according to Figs. 8 and 9 is attachable to a drive assembly 7 which is adapted to reciprocate the saw-blade 4 rectilinearly at high speed.

10 The saw-blades 1 to 3 comprise two saw portions 8, 9 on one side 10 of the saw-blade, while the saw-blade 4 comprises two saw portions 11, 12 on one side 13 of the saw-blade. The saw-blades 1 to 3 have an inner space 14 and the saw-blade 4 has a corresponding inner space 15. The space 14 is connected via a conduit 16 to a coolant supply device (not shown) which comprises for instance a coolant container and a pump for providing a certain coolant pressure in the saw-blade. Correspondingly, the space 15 of the saw-blade 4 is connected via a conduit 17 to a coolant supply device (not shown).

The coolant supplied from the respective coolant device 18 preferably is a liquid of suitable type or, alternatively, a gas. The respective coolant supply device suitably delivers a coolant flow of 30 to 90 ml per minute, preferably 70 to 90 ml per minute, at the outlet openings of the respective spaces 14 and 15.

For efficient cooling of the saw-blade 1, 2, 3 and 4, respectively, the space 14 and 15, respectively, extends up to the two saw portions 8, 9 and 11, 12, respectively, and said space is open between said saw portions - via an outlet opening 19 and 20, respectively - on the one hand, to conduct coolant 18 to the saw portions 8, 9 and 11, 12, respectively, (arrow A, B, C; Fig. 2) for the cooling thereof, and on the other hand, to cause coolant 18 to emerge between the saw portions 8, 9 and 11, 12, respectively, (arrow A1, B1, C1; Fig. 4) for carrying off bone residues or other saw residues in a direction away from the saw portions 8, 9 and 11, 12.

5.

respectively.

In the embodiment illustrated in Figs. 1 to 6 the saw-blade 1, 2 and 3, respectively, is in the form of an elongated square tube of substantially rectangular cross-sectional shape. Said saw-blade 1, 2 and 3, respectively, has two parallel sides 21 and 22 which are also parallel with the plane of oscillation in which the saw-blade oscillates. The sides 21, 22 are interconnected via substantially narrower sides 23, 24 so as to constitute a rectangular shape of substantially larger width than height.

Said saw-blade 1, 2 and 3, respectively, has a rear fastening portion 25 by which it is connectable to the drive assembly 5. In proximity to the fastening portion 25 there is arranged, on the side 22 parallel with the plane of oscillation, a hose nipple 26 on to which a hose 27 is passed. The hose 27 is part of the conduit 17 for supply of coolant 18 from the coolant supply device to the space 14.

The square tube is open at the front end so as to form the outlet opening 19 between the saw portions 8 and 9 that are formed in that the front end edges of the parallel sides 21, 22 are provided with saw tooth rows 28, 29.

The space 14 intended for coolant 18 preferably widens in the forward direction towards the side 10 thereof having the saw portions 8, 9 and is substantially as wide as said side 10 and opens into the outlet opening 19 which is substantially as wide as said side 10. As a result, coolant 18 can reach the saw portions 8, 9 in their entire widths, being thus capable of cooling all parts thereof. Suitably, the saw portions 8, 9 are also substantially as long as the side 10.

This embodiment of the saw-blade 1 to 3 permits coolant 18 to enter the blade at the rear thereof and to flow forwardly along the inside of all four sides 21 to 24 directly to the saw tooth rows 28 and 29, exiting through the front outlet opening 19 and finally flowing



6.

in the forward direction away from the saw tooth rows 28, 29. This implies that coolant 18 cools all sides 21 to 24 of the saw-blade along substantial parts of their lengths; it cools the saw tooth rows 28, 29 by getting  
5 in direct contact with them, and when coolant 18 flows out of the outlet opening 19 it carries along bone residues and other saw residues from the saw tooth rows 28, 29, i.e. it cleans said rows simultaneously as coolant 18 continuously counteracts clogging of the saw tooth rows  
10 28, 29.

The saw-blade may be a single unit as shown in Figs. 1 to 4 but, alternatively, it may comprise two separate parts 30, 31 as shown in Fig. 5. This saw-blade 2 thus consists, on one hand, of a fastening member 30 provided  
15 with the fastening portion 25 and, on the other hand, of a front member 31 provided with the saw portions 8, 9. These two members 30, 31 are suitably interconnectable and again disconnectable. For instance, the fastening member 30 may comprise four claws 32 to 35 which are arranged  
20 each on their respective sides 21 to 24, and the front member 31 comprises recesses 36 to 39 corresponding to the claws 32 to 35.

The claws 32 to 35 are resilient or have resilient studs so that, on one hand, they can yield when the front  
25 member 31 is moved towards the fastening member 30, and, on the other hand, snap into the recesses 36 to 39 of the fastening member 31. To disengage the front member 31 from the fastening member 30 the claws 32 to 35 have to be urged out of the recesses 36 to 39 with the aid of a  
30 special disengagement tool, whereby it is ensured that the front member 31 cannot come loose or be released involuntarily.

This embodiment of the saw-blade 2 permits using a fastening member 30 over a long period, while a used  
35 front member 31 may be exchanged, after say one operation or a few operations, for a new one.

A further alternative of the saw-blade is shown in Fig. 6. The saw-blade 3 according to this alternative has

7.

saw portions 8, 9 in the form of saw wires 40 and 41. These are preferably detachably mounted on the square tube so as to bear against the front edges of the sides 21, 22. The saw wires 40, 41 are preferably comprised in  
5 a unit 42 which is detachably mounted on the square tube to permit being dismounted with the aid of a releasing tool and replaced whenever necessary.

Finally, Figs. 8 and 9 illustrate a saw-blade 4 in the form of an elongated blade which is disposed on the  
10 drive assembly 7. Said assembly is intended to impart linear reciprocating saw movements to the saw-blade 4 and is designed in a manner known per se. The saw-blade 4 has an inner space 15 to which is connected the conduit 17 coming from the coolant supply device. The saw  
15 portions 11, 12 of the saw-blade 4 extend along one long side 13 of the blade and said long side is fully open so as to form the outlet opening 20 for coolant between the saw portions 11, 12. The latter need not extend along the entire blade but possibly only along a part thereof, in  
20 which case the outlet opening 20 does not either extend along the entire blade but only along a part thereof. The inner space 15 of the blade is preferably divided into longitudinal passages 43 to 45, one of the passages (in the present instance, the passage 43) being adapted to  
25 conduct coolant 18 to a front end portion 46 of the saw-blade 4. It is thereby ensured that coolant 18 reaches the front end portions of the saw-blade 4, which is important because the saw portions 11, 12 at this end portion will be warmest and thus need be effectively cooled.

30 The coolant supply device is preferably adapted to supply coolant in the form of a cooling liquid to the space 14 and 15, respectively, at such a pressure that the coolant delivery in the outlet opening 19 and 20, respectively, amounts to 30 to 90 ml per minute, preferably  
35 ably 70 to 90 ml per minute. Such a coolant flow has proved to produce a particularly favorable cooling effect and a good saw portion cleaning effect without any negative effects, for instance in the form of splashing.

8.

The embodiments of the saw-blade described above and illustrated in the drawings may be varied within the scope of the appendant claims, with regard to design and function. As examples of further embodiments, it should  
5 be mentioned that the saw tooth rows 28, 29 or the saw tooth wires 40, 41 may be arcuate, extending along arcs the centers of which are centred with the center of oscillation 6 of the saw-blade 1, 2 and 3, respectively. The saw-blade may possibly have saw portions on more  
10 than one side and at more than two edges. There may also be more than one outlet opening for coolant and the inner space may be divided into a number of separate sections, maintaining however the extension of the space up to the side provided with the saw portions. Any suit-  
15 able liquid may serve as coolant, but it may be possible to use gas instead of liquid.

## Claims:

1. A saw-blade for sawing living human bone at surgical operations, said saw-blade (1, 2, 3 and 4, respectively) presenting on at least one side (10 and 13, respectively) at least two saw portions (8, 9 and 11, 12, respectively) and said saw-blade (1, 2, 3 and 4, respectively) having at least one inner space (14 and 15, respectively) through which coolant (18) is adapted to flow for cooling the saw-blade (1, 2, 3 and 4, respectively) during sawing, characterised in that the space (14 and 15, respectively) extends up to the two saw portions (8, 9 and 11, 12, respectively) and is open between said portions in order, on one hand, to conduct coolant (18) to the saw portions (8, 9 and 11, 12, respectively) for cooling them and, on the other hand, to cause coolant (18) to emerge between the saw portions (8, 9 and 11, 12, respectively) for carrying off bone residues or other saw residues in a direction away from the saw portions (8, 9 and 11, 12, respectively).

2. A saw-blade as claimed in claim 1, characterised in that it is designed as an elongated square tube of substantially rectangular cross-sectional shape, that the saw portions (8, 9) are formed by or arranged on the end edges of two parallel sides (21, 22) of the square tube, that the space (14) for coolant (18) is designed to permit coolant (18) to reach and flow along the inside of all four sides (21, 22, 23, 24) of the square tube and that the outlet opening (19) for coolant (18) is formed by the square tube being open between the edges, preferably the end edges, which constitute the saw portions (8, 9) or on which said portions are arranged.

3. A saw-blade as claimed in claim 2, characterised in that the square tube has a rear fastening portion (25) for the mounting of the tube on a drive assembly (5) adapted to impart to the saw-blade (1) reciprocating oscillation movements and that a conduit (16) for supply of coolant (18) to the saw-blade

10.

(1) is disposed in proximity to the fastening portion (25), preferably on one (22) of the sides (21, 22) of the square tube which are parallel with the plane of oscillation.

5           4. A saw-blade as claimed in claim 3, c h a r a c t e r i s e d in that the square tube comprises two separate parts (30, 31), viz. a fastening member (30) having a fastening portion (25) for the mounting thereof on a drive assembly (5), and a front member (31)  
10 provided with the saw portions (8, 9), said two members (30, 31) being interconnectable and again disconnectable after use.

          5. A saw-blade as claimed in claim 4, c h a r a c t e r i s e d in that the fastening member (30) and  
15 the front member (31) are provided with coupling means (32 to 39) permitting the members (30, 31) to be engaged by snap action and also permitting the members (31, 32) to be disengaged after use from one another with the aid of a disengagement tool.

20           6. A saw-blade as claimed in any of the preceding claims, c h a r a c t e r i s e d in that the saw portions (8, 9) consist of arcuate saw tooth rows extending along arcs whose centers are centred with a center of oscillation (6) about which the saw-blade (1, 2 and 3,  
25 respectively) is intended to oscillate.

          7. A saw-blade as claimed in any of the preceding claims, c h a r a c t e r i s e d in that the space (14) for coolant (18) widens towards the side (10) thereof provided with the saw portions (8, 9) and is substantially as wide as said side (10) and opens into an  
30 outlet opening (19) which is also substantially as wide as said side (10).

          8. A saw-blade as claimed in any of claims 1 to 3, c h a r a c t e r i s e d in that the saw portions (8,  
35 9) of the saw-blade are formed by two saw wires (40, 41) which are adapted to be disengaged with the aid of a disengagement tool to permit exchange of said wires after use.

11.

9. A saw-blade as claimed in claim 1, c h a r a c-  
t e r i s e d in that the saw portions (11, 12) of the  
saw-blade are arranged along one long side (13) of the  
saw-blade (4), said side being open to permit coolant  
5 (18) to emerge between the saw portions and the inner  
space (15) of the saw-blade (4) being preferably divided  
into longitudinal passages (43, 44, 45) to conduct cool-  
ant (18) to a front end portion (46) of the saw-blade (4).

10 10. A saw-blade as claimed in any of the preceding  
claims, c h a r a c t e r i s e d in that the space (14  
and 15, respectively) of the saw-blade, which is intended  
for coolant (18), is connected to a coolant supply dev-  
ice which provides a coolant flow of 30 to 90 ml per  
minute, at the outlet opening (19 and 20, respectively)  
15 of the space (14 and 15, respectively).

## AMENDED CLAIMS

[received by the International Bureau on 17 July 1989 (17.07.89)  
original claims 1-8 amended; other claims unchanged (2 pages)]

1. A saw-blade for sawing living human bone at surgical operations, said saw-blade (1, 2, 3 and 4, respectively) presenting on at least one side (10 and 13, respectively) at least two saw portions (8, 9 and 11, 12, respectively) and said saw-blade (1, 2, 3 and 4, respectively) having at least one inner space (14 and 15, respectively) through which coolant (18) is adapted to flow for cooling the saw-blade (1, 2, 3 and 4, respectively) during sawing, c h a r a c t e r i s e d in that it is  
10 designed as an elongated square tube of substantially rectangular cross-sectional shape, that the saw portions (8, 9) are formed by or arranged on the end edges of two parallel sides (21, 22) of the square tube, that the space (14) for coolant (18) is designed to permit  
15 coolant (18) to reach and flow along the inside of all four sides (21, 22, 23, 24) of the square tube and that the outlet opening (19) for coolant (18) is formed by the square tube being open between the edges which constitute the saw portions (8, 9) or on which said portions  
20 are arranged.

2. A saw-blade as claimed in claim 1, c h a r a c t e r i s e d in that the square tube has a rear fastening portion (25) for the mounting of the tube on a drive assembly (5) adapted to impart to the saw-blade  
25 (1) reciprocating oscillation movements and that a conduit (16) for supply of coolant (18) to the saw-blade (1) is disposed in proximity to the fastening portion (25), preferably on one (22) of the sides (21, 22) of the square tube which are parallel with the plane of oscillation.  
30

3. A saw-blade as claimed in claim 2, c h a r a c t e r i s e d in that the square tube comprises two separate parts (30, 31), viz. a fastening member (30) having a fastening portion (25) for the mounting thereof on a drive assembly (5), and a front member (31)  
35 provided with the saw portions (8, 9), said two members

(30, 31) being interconnectable and again disconnectable after use.

4. A saw-blade as claimed in claim 3, c h a r a c t e r i s e d in that the fastening member (30) and the front member (31) are provided with coupling means (32 to 39) permitting the members (30, 31) to be engaged by snap action and also permitting the members (31, 32) to be disengaged after use from one another with the aid of a disengagement tool.

5. A saw-blade as claimed in any of the preceding claims, c h a r a c t e r i s e d in that the space (14) for coolant (18) widens towards the side (10) thereof provided with the saw portions (8, 9) and is substantially as wide as said side (10) and opens into an outlet opening (19) which is also substantially as wide as said side (10).



6. A saw-blade as claimed in any of claims 1 or 2, c h a r a c t e r i s e d in that the saw portions (8, 9) of the saw-blade are formed by two saw wires (40, 41) which are adapted to be disengaged with the aid of a disengagement tool to permit exchange of said wires after use.

7. A saw-blade as claimed in claim 1, c h a r a c t e r i s e d in that the saw portions (11, 12) of the saw-blade are arranged along one long side (13) of the saw-blade (4), said side being open to permit coolant (18) to emerge between the saw portions and the inner space (15) of the saw-blade (4) being preferably divided into longitudinal passages (43, 44, 45) to conduct coolant (18) to a front end portion (46) of the saw-blade (4).

8. A saw-blade as claimed in any of the preceding claims, c h a r a c t e r i s e d in that the space (14 and 15, respectively) of the saw-blade, which is intended for coolant (18), is connected to a coolant supply device which provides a coolant flow of 30 to 90 ml per minute, preferably 70-90 ml per minute, at the outlet opening (19 and 20, respectively) of the space (14 and 15, respectively).



1 / 5

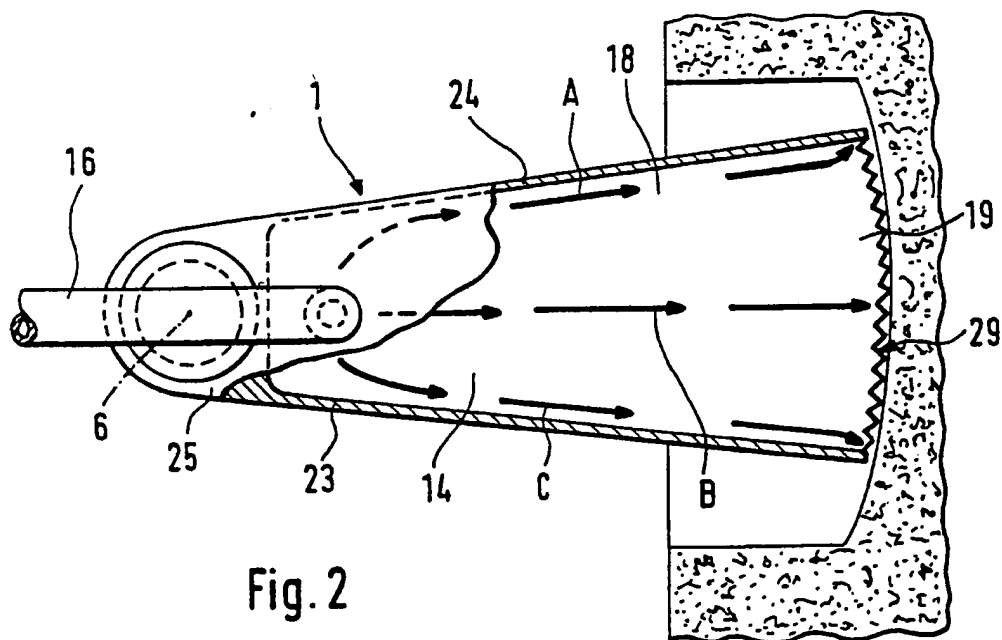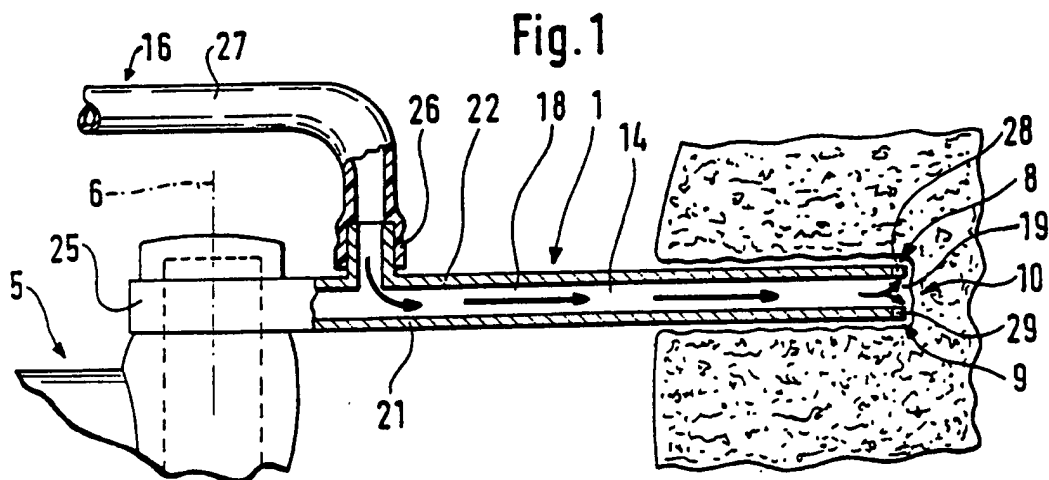

SUBSTITUTE SHEET

2 / 5

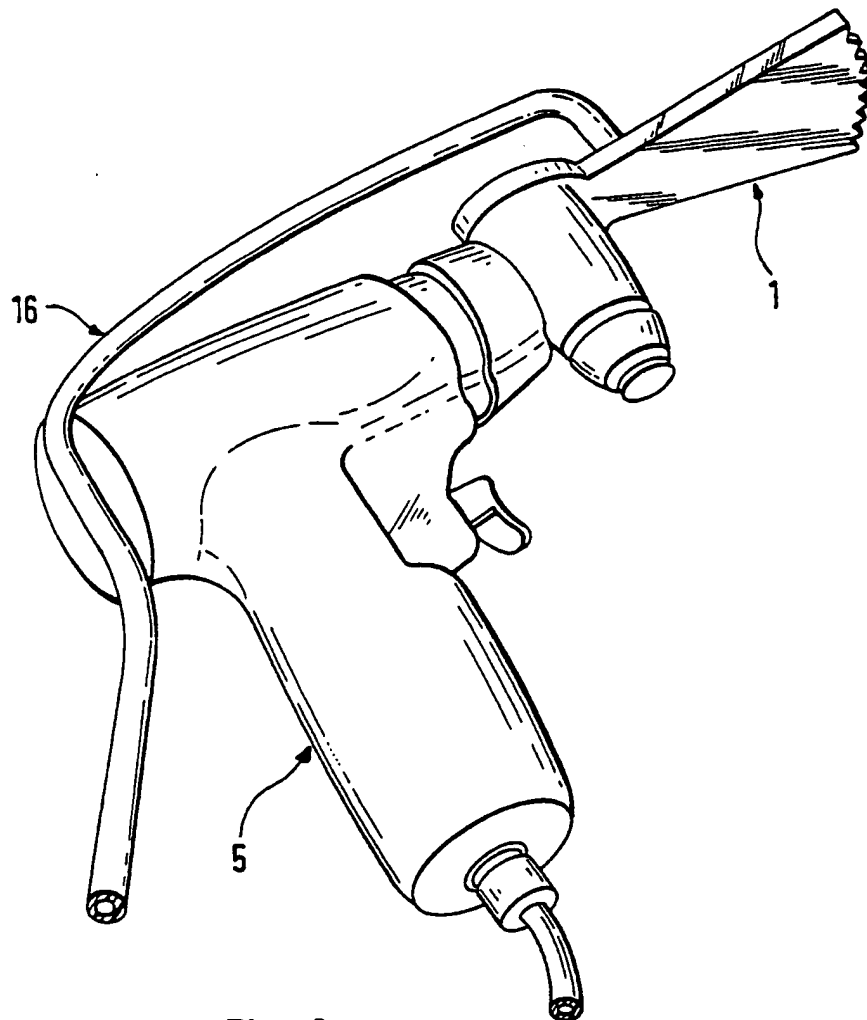


Fig. 3

SUBSTITUTE SHEET

3 / 5

Fig. 4

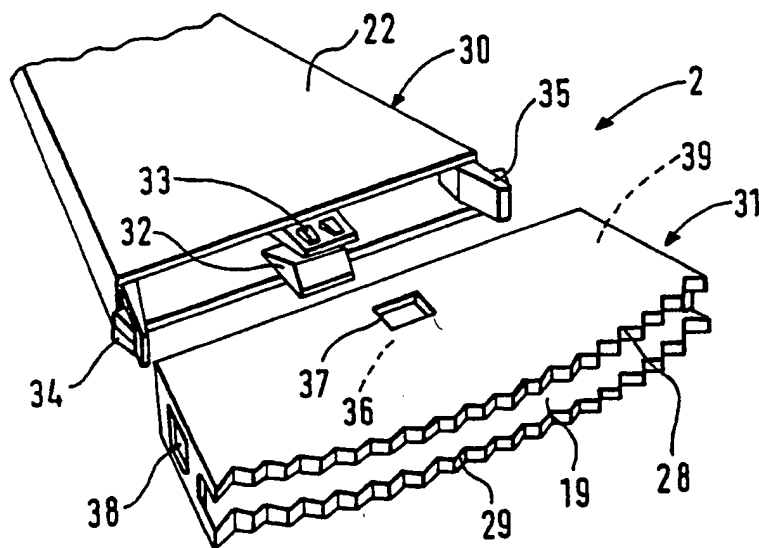
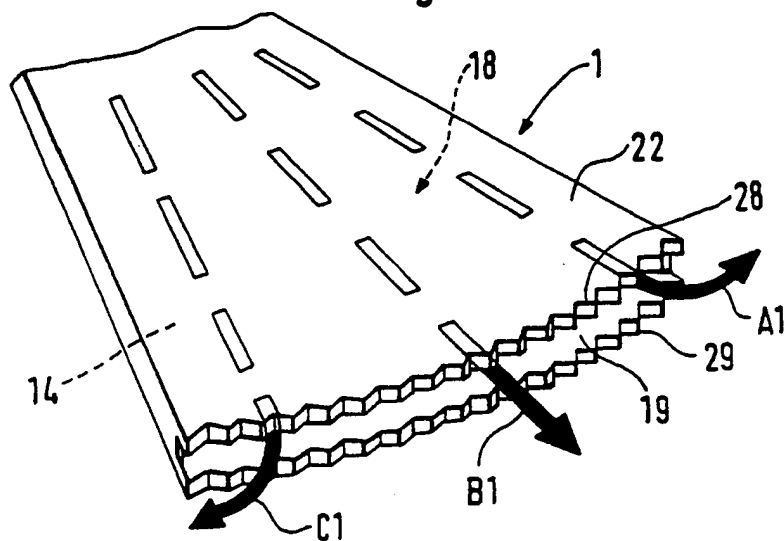


Fig. 5

SUBSTITUTE SHEET

4 / 5

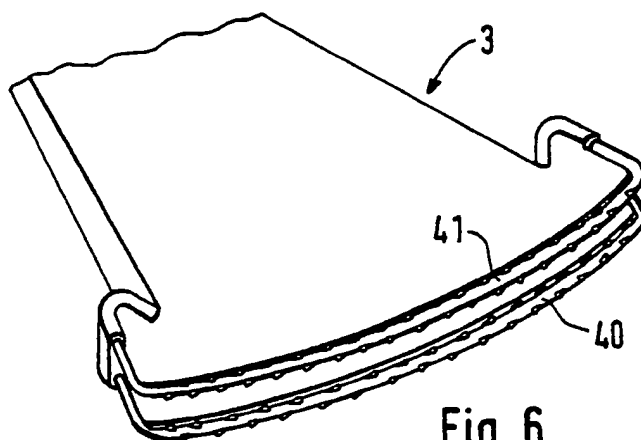


Fig. 6

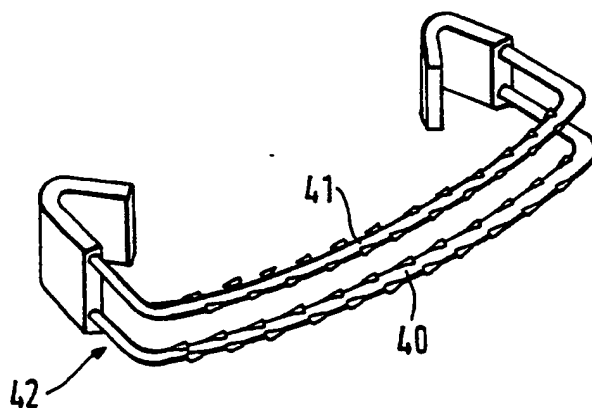


Fig. 7

SUBSTITUTE SHEET

5 / 5

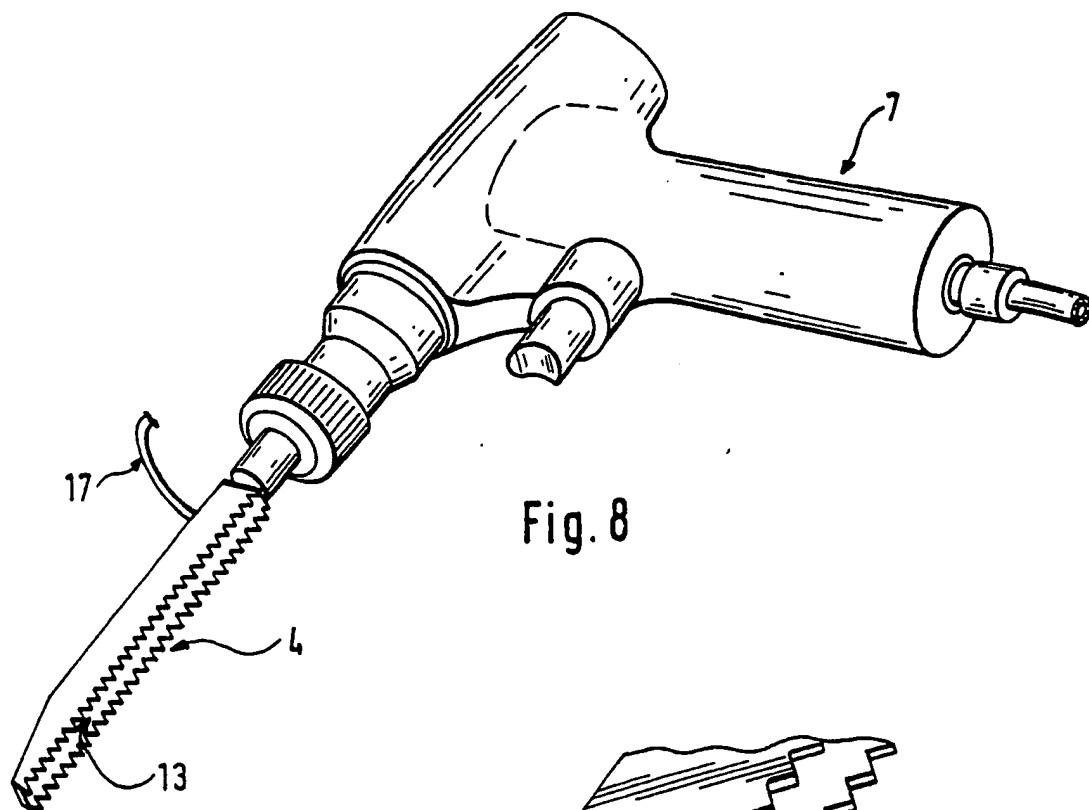


Fig. 8

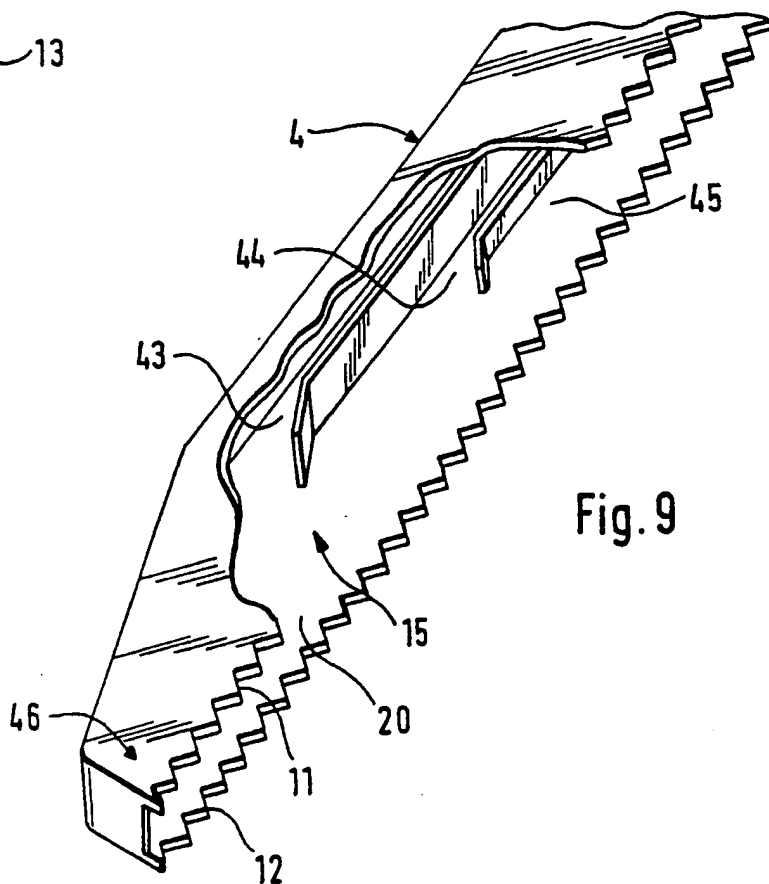


Fig. 9

# INTERNATIONAL SEARCH REPORT

International Application No PCT/SE89/00141

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) * According to International Patent Classification (IPC) or to both National Classification and IPC 4 A 61 B 17/14														
<b>II. FIELDS SEARCHED</b> <div style="text-align: right; font-size: small;">Minimum Documentation Searched 7</div> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;">           Classification System 1            IPC 4         </td> <td style="width: 50%; border: none; vertical-align: top;">           Classification Symbols            A 61 B; B 23 D         </td> </tr> </table> <div style="text-align: center; font-size: x-small; margin-top: 10px;">           Documentation Searched other than Minimum Documentation            to the Extent that such Documents are Included in the Fields Searched *         </div> <p style="margin-top: 20px;">SE, NO, DK; FI classes as above</p>			Classification System 1 IPC 4	Classification Symbols A 61 B; B 23 D										
Classification System 1 IPC 4	Classification Symbols A 61 B; B 23 D													
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT *</b> <table border="1" style="width: 100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th style="width: 10%;">Category *</th> <th style="width: 70%;">Citation of Document, ** with indication, where appropriate, of the relevant passages 12</th> <th style="width: 20%;">Relevant to Claim No. 13</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td style="vertical-align: top;">           US, A, 4 008 720 (BRINCKMANN ET AL)            22 February 1977            see abstract, figures 1-3            &amp; DE, 2427716         </td> <td style="text-align: center; vertical-align: top;">1,6,10</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td style="vertical-align: top;">           FR, A, 1 565 396 (MERLE D'AUBIGNE)            2 May 1969            see whole document         </td> <td style="text-align: center; vertical-align: top;">1,6,10</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">           WO, A1, 86/05727 (GEBELIUS)            9 October 1986            see claim 6, fig. 5         </td> <td></td> </tr> </tbody> </table>			Category *	Citation of Document, ** with indication, where appropriate, of the relevant passages 12	Relevant to Claim No. 13	Y	US, A, 4 008 720 (BRINCKMANN ET AL) 22 February 1977 see abstract, figures 1-3 & DE, 2427716	1,6,10	Y	FR, A, 1 565 396 (MERLE D'AUBIGNE) 2 May 1969 see whole document	1,6,10	A	WO, A1, 86/05727 (GEBELIUS) 9 October 1986 see claim 6, fig. 5	
Category *	Citation of Document, ** with indication, where appropriate, of the relevant passages 12	Relevant to Claim No. 13												
Y	US, A, 4 008 720 (BRINCKMANN ET AL) 22 February 1977 see abstract, figures 1-3 & DE, 2427716	1,6,10												
Y	FR, A, 1 565 396 (MERLE D'AUBIGNE) 2 May 1969 see whole document	1,6,10												
A	WO, A1, 86/05727 (GEBELIUS) 9 October 1986 see claim 6, fig. 5													
<div style="display: flex; justify-content: space-between; font-size: x-small;"> <div style="width: 45%;"> <p>* Special categories of cited documents: 10</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"A" document member of the same patent family</p> </div> </div>														
<b>IV. CERTIFICATION</b> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;">           Date of the Actual Completion of the International Search  <div style="text-align: center; margin-top: 10px;">1989-05-30</div> </td> <td style="width: 50%; border: none; vertical-align: top;">           Date of Mailing of this International Search Report  <div style="text-align: center; margin-top: 10px;">1989 -06- 1 4</div> </td> </tr> <tr> <td style="width: 50%; border: none; vertical-align: top;">           International Searching Authority  <div style="text-align: center; margin-top: 10px;">Swedish Patent Office</div> </td> <td style="width: 50%; border: none; vertical-align: top;">           Signature of Authorized Officer  <div style="text-align: center; margin-top: 10px;">              Hans Peterson           </div> </td> </tr> </table>			Date of the Actual Completion of the International Search <div style="text-align: center; margin-top: 10px;">1989-05-30</div>	Date of Mailing of this International Search Report <div style="text-align: center; margin-top: 10px;">1989 -06- 1 4</div>	International Searching Authority <div style="text-align: center; margin-top: 10px;">Swedish Patent Office</div>	Signature of Authorized Officer <div style="text-align: center; margin-top: 10px;">              Hans Peterson           </div>								
Date of the Actual Completion of the International Search <div style="text-align: center; margin-top: 10px;">1989-05-30</div>	Date of Mailing of this International Search Report <div style="text-align: center; margin-top: 10px;">1989 -06- 1 4</div>													
International Searching Authority <div style="text-align: center; margin-top: 10px;">Swedish Patent Office</div>	Signature of Authorized Officer <div style="text-align: center; margin-top: 10px;">              Hans Peterson           </div>													